


# 300 Series

All models in the Rapid 300 series can be used either as a central granulator or as inline granulator for all types of materials. Typical applications include sprues, molded items, profiles, smaller pipes, sheets, etc. 3 widths are available in standard version.

- **Open-Hearted design.**
- **Lower energy consumption with double-scissors cutting action.**
- **Pre-adjustable knives** for optimal knife sharpness.
- **High quality regrind.**
- **Various infeed options for all types of applications.**
- **Reversible screen** – for longer life.
- **Constant Cutting Circle (CCC).**



| Specifications              |    | 300-30        | 300-45        | 300-60        |
|-----------------------------|----|---------------|---------------|---------------|
| Rotor diameter              | mm | 260           | 260           | 260           |
| Rotor type                  |    | 3-blade, open |               |               |
| Rotating knives             |    | 3 (3x1)       | 3 (3x1)       | 3 (3x1)       |
| Cutterhouse Super-Tagential | mm | 320x360       | 470x360       | 620x360       |
| Cutterhouse Tagential       | mm | 320x285       | 470x285       | 620x285       |
| Fixed knives                |    | 2 (3)         | 2 (3)         | 2 (3)         |
| Motor (Standard)            | kW | 5,5           | 7,5           | 7,5           |
| Motor (Optional)            | kW | 7,5 / 11 / 15 | 5,5 / 11 / 15 | 5,5 / 11 / 15 |
| <b>Dimensions</b>           |    |               |               |               |
| A                           | mm | 300           | 450           | 600           |
| B                           | mm | 1150          | 1300          | 1450          |

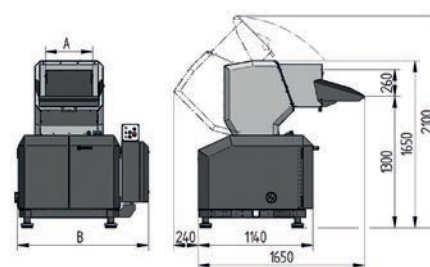

300 Series