


# 200 Series

The models in the Rapid 200 series are ideal for direct recycling of sprues and reject products, especially from injection molding and blow molding machines. 4 different widths are available in the standard versions.

- **Low energy consumption.**
- **Configurable cutterhouse** – depending on application.
- **High-quality regrind.**
- **Compact and flexible** – several types of infeeds, including manual feeding, belts, roller feeds etc.
- **Reversible screen** – for longer life.
- **Constant Cutting Circle (CCC).**



Specifications		200-24	200-36	200-48	200-60
Rotor diameter	mm	200	200	200	200
Rotor type		Staggered			
Rotating knives		6 (3x2)	9 (3x3)	12 (3x4)	15 (3x5)
Cutterhouse Super-Tangential	mm	240x230	360x230	480x230	600x230
Fixed knives		2	2	2	2
Motor (Standard)	kW	4,0	5,5	5,5	5,5
Motor (Optional)	kW	5,5 / 7,5 / 11	7,5 / 11	7,5 / 11	7,5 / 11
<b>Dimensions</b>					
<b>A</b>	mm	650	770	890	1100
<b>B</b>	mm	240	360	480	600

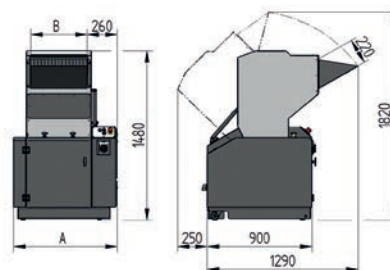

200 Series