


400 Series

All models in the Rapid 400 series can be used either as a central granulator or as in-line granulator for all types of materials. Typical applications include large sprues, molded items, profiles, smaller pipes, sheets, etc. 4 different models are available.

- Open-Hearted design.
- Lower energy consumption with double-scissors cutting action.
- Pre-adjustable knives for optimal knife sharpness.
- High quality regrind.
- Various infeed options for all types of applications.
- Reversible screen – for longer life.
- Constant Cutting Circle (CCC).



Specifications		400-45	400-60	400-90	400-120
Rotor diameter	mm	360	360	360	360
Rotor type		3-blade, open			
Rotating knives		3	3	3	6
Fixed knives		2	2	2	4
Cutterhouse Super-Tangential	mm	470x450	620x450	920x450	1220x450
Cutterhouse Tangential	mm	470x360	620x360	920x360	1220x360
Motor (Standard)	kW	15	22	22	22
Motor (Optional)	kW	11 / 18.5 / 22 / 30		11 / 15 / 18.5 / 30 / 37	
Dimensions					
A	mm	450	600	900	1200
B	mm	1340	1490	1790	2090

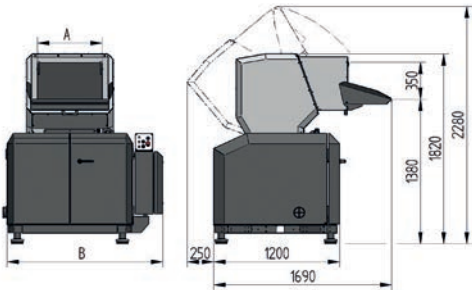

400 Series